


# ARUBA | ARUBA DOUBLE

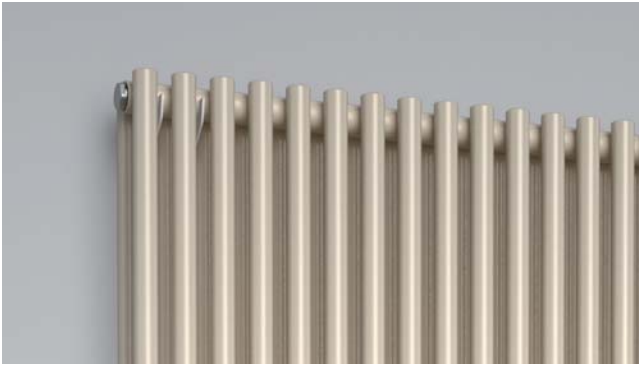

## ARUBA

Material	steel pipes Ø 28 mm / steel pipes Ø 22 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	8, 13 17

## ARUBA DOUBLE

Material	steel pipes Ø 28 mm / steel pipes Ø 22 mm
Connection thread	2 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	16, 26, 34



ARUBA DOUBLE 1800 × 600

## ARUBA


Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/300	49	10,0	5,1	1,291	530	430	274	-	-	mc 50
1800/480	49	16,5	8,3	1,291	855	693	442	-	-	mc 50
1800/600	49	21,0	10,9	1,291	1064	862	550	-	-	mc 50

## ARUBA DOUBLE



Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1800/300	70	19,5	10,0	1,307	834	674	433	-	-	mc 50
1800/480	70	31,5	16,3	1,307	1334	1079	693	-	-	mc 50
1800/600	70	40,5	21,2	1,307	1667	1348	866	-	-	mc 50

Thermal power measuring follows in accordance with EN 442.

Accessories (page 48, 49 and 50) is not part of the radiator.



Connection options

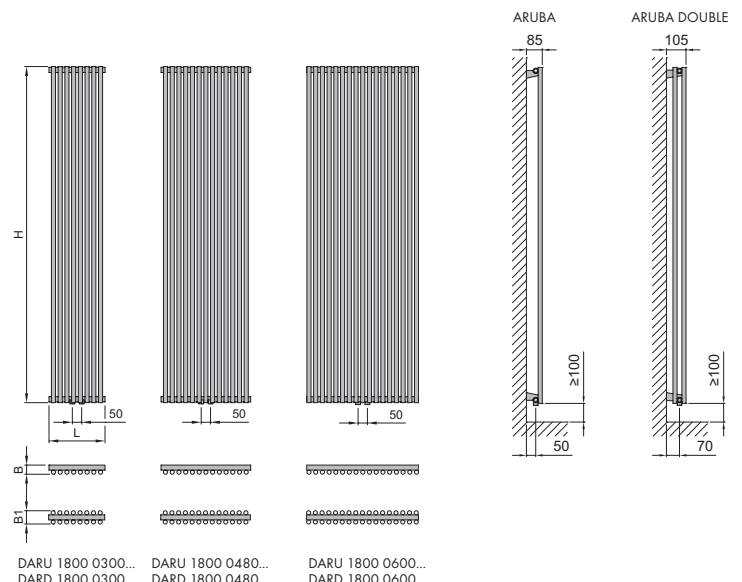

DARU 1800 0300... DARU 1800 0480... DARU 1800 0600...  
DARD 1800 0300... DARD 1800 0480... DARD 1800 0600...