


DROPS




DECORATIONS

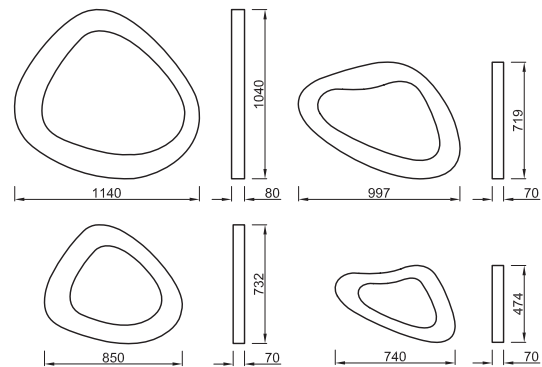


- Fittings: connections 1/2"
- Material: stainless steel
- DECORATIONS material: wood, stainless steel, cooper, brass, painted steel
- Operating pressure: max.6 Bar
- Surface finish: mirror
- Operating temperature: max.95°C

code	width mm	height mm	thermal output at Δt. 50°K- Watt	thermal output at Δt. 50°Kmm BTU/h	code	width mm	height mm	thermal output at Δt. 50°K Watt	thermal output at Δt. 50°K BTU/h
IRD11401044	1140	1040	300	1024	IRD08500732	850	732	200	680
IRD09970719	997	719	210	714	IRD07400474	740	474	100	340

DROPS

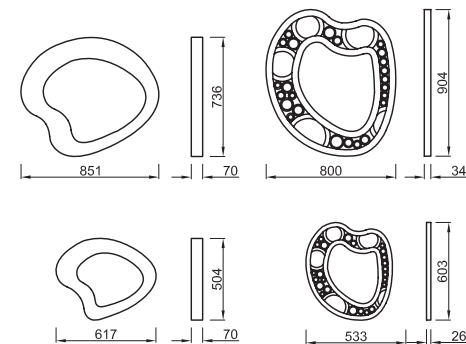

DECORATIONS



- Fittings: connections 1/2"
- Material: stainless steel
- DECORATIONS material: wood, stainless steel, cooper, brass, painted steel
- Operating pressure: max.6 Bar
- Surface finish: mirror
- Operating temperature: max.95°C





code	width mm	height mm	thermal output at Δt. 50°K Watt	thermal output at Δt. 50°Kmm BTU/h	code	width mm	height mm	thermal output at Δt. 50°K Watt	thermal output at Δt. 50°K BTU/h
IRD08510736	851	736	140	476	IRD06170504	617	504	80	272
IRD08000904	800	904	240	816	IRD05330603	533	603	160	544

CLOUDY

MLOUDY

HUBBLE

BUBBLE

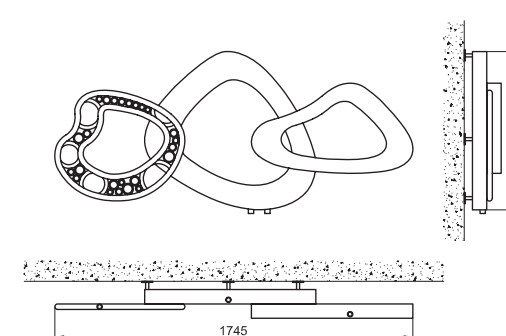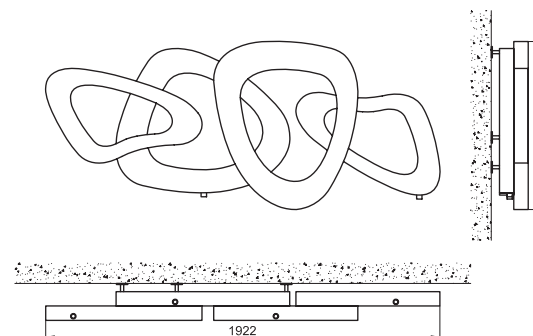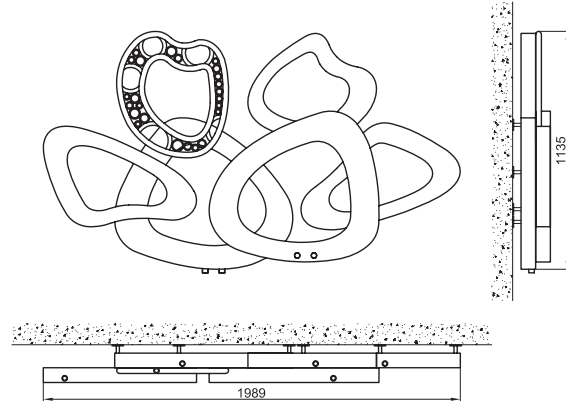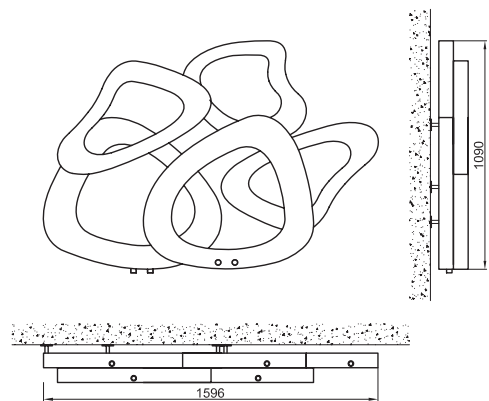

- Fittings: connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin/mirror/rusted steel

- Operating temperature: max.95°C

code	width mm	height mm	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K_{mm}$ BTU/h
IRDC15961090	1596	1090	680	2312
IRD19891135	1989	1135	840	2856




- Fittings: connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin/mirror/rusted steel


- Operating temperature: max.95°C

code	width mm	height mm	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K_{mm}$ BTU/h
IRDH19220819	1922	819	600	2040
IRDB17450771	1745	771	460	1564


FOAM

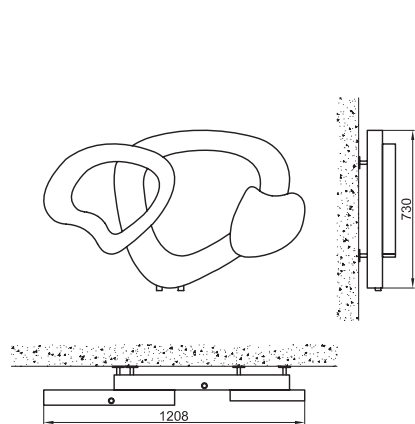


TEAR

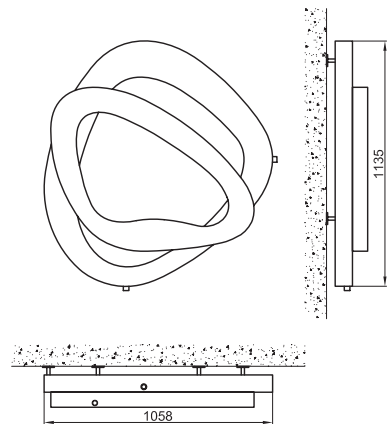

DASH

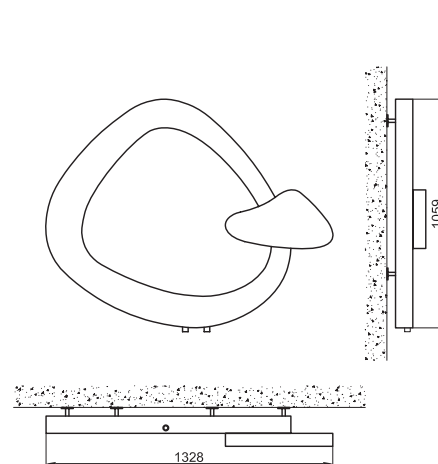

PEARL

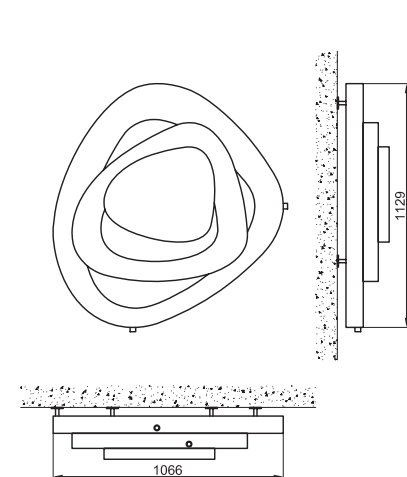

- Fittings: connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin/mirror

- Operating temperature: max.95°C

code	width mm	height mm	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K_{mm}$ BTU/h
IRDF12080730	1208	730	280	952
IRDT10581135	1058	1135	510	1734



- Fittings: connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin/mirror

- Operating temperature: max.95°C

code	width mm	height mm	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K_{mm}$ BTU/h
IRDD13281059	1328	1059	300	1020
IRDP10661129	1066	1129	500	1700