

# FINGER PRINT




- Fittings: four connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: mirror

- Operating temperature: max.95°C

code	width mm	height mm	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K_{mm}$ BTU/h
IRIF10061338	1006	1338	515	1751
IRIF12071605	1207	1605	670	2278

# BARCODE LEVEL

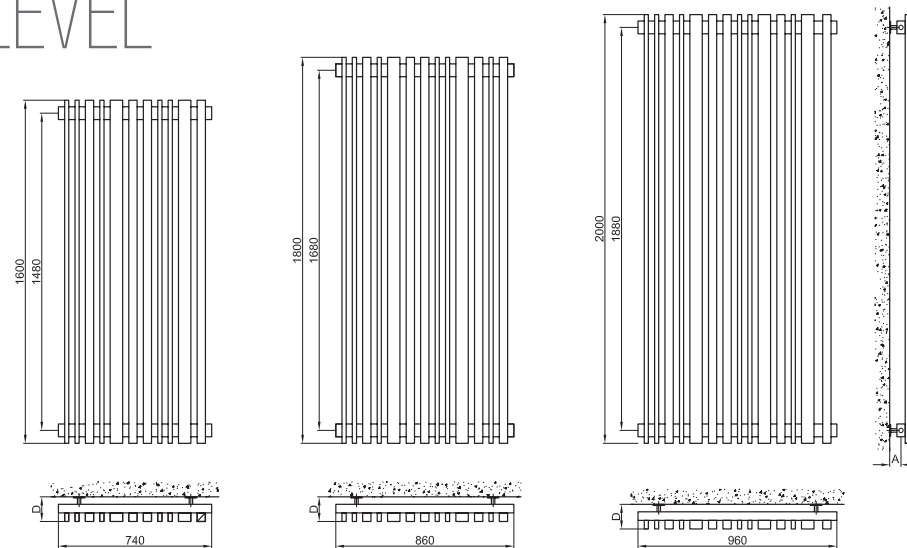


- Fittings: four connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin

- Operating temperature: max.95°C

code	width mm	height mm	distance between centers mm	D mm	A mm	weight kg	capacity lit	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K$ BTU/h
IRBL07401600	740	1600	1480	115	55	46.9	22.3	1092	3724
IRBL08601800	860	1800	1680	115	55	61.0	28.6	1353	4614
IRBL09602000	960	2000	1880	115	55	75.6	35.8	1595	5439

# BARCODE ROUND

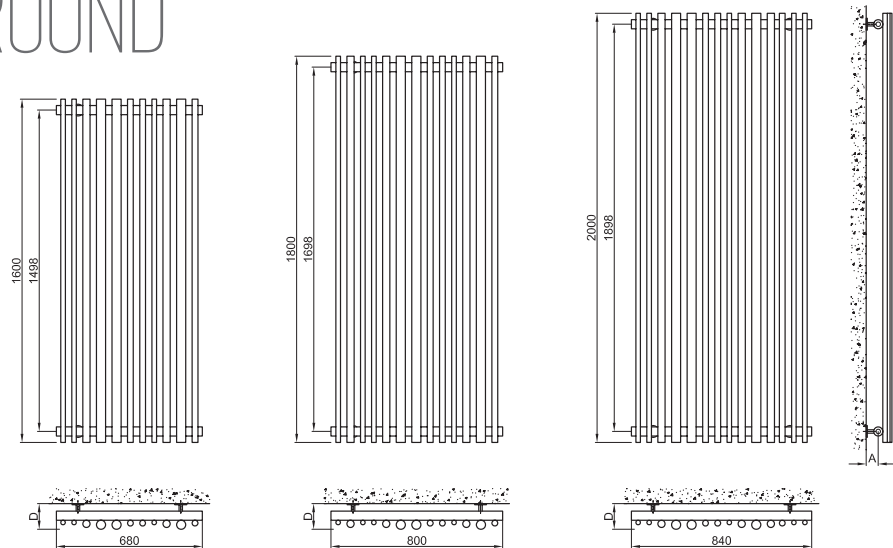


- Fittings: four connections 1/2"
- Material: stainless steel

- Operating pressure: max. 6 Bar
- Surface finish: mirror/satin

- Operating temperature: max. 95°C

code	width mm	height mm	distance between centers mm	D mm	A mm	weight kg	capacity lit	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K$ BTU/h
IRBR06801600	680	1600	1498	120	56	22.7	13.3	869	2963
IRBR08001800	800	1800	1698	120	56	29.3	16.8	1067	3638
IRBR08402000	840	2000	1898	120	56	34.0	19.1	1176	4010

# BARCODE DOUBLE

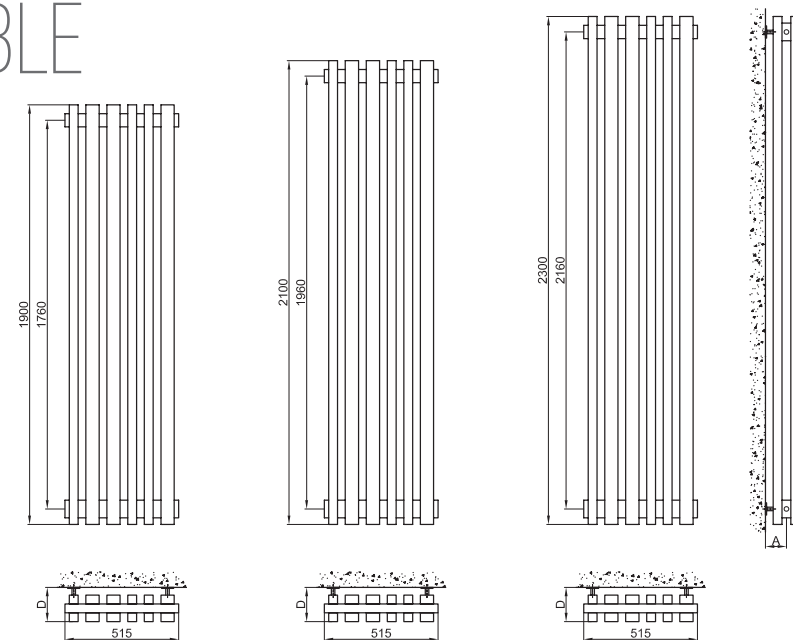

- Fittings: four connections 1/2"
- Operating pressure: max. 6 Bar
- Operating temperature: max. 95°C

- Material: stainless steel
- Surface finish: satin

code	width mm	height mm	distance between centers mm	D mm	A mm	weight kg	capacity lit	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K$ BTU/h
IRBD05151900	515	1900	1760	155	95	70.0	40.6	1957	6673
IRBD05152100	515	2100	1960	155	95	76.9	44.5	2044	6970
IRBD05152300	515	2300	2160	155	95	83.9	48.5	2150	7331