


TANGENT LIFE

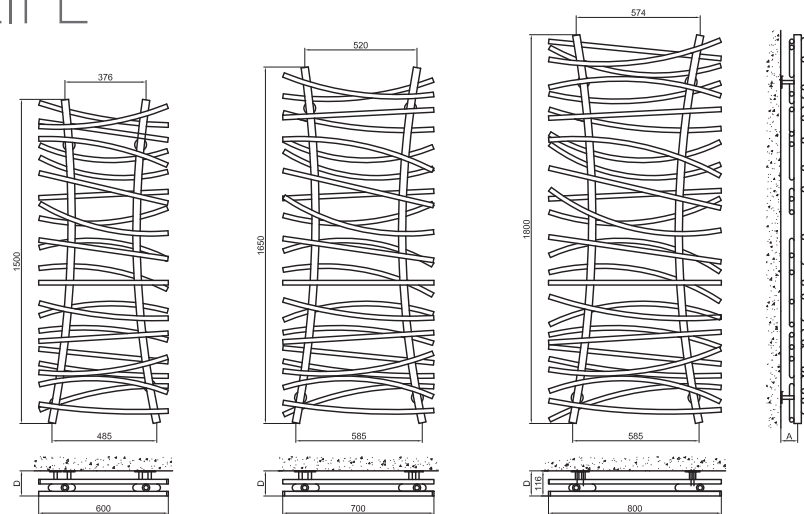


- Fittings: four connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin/mirror

- Operating temperature: max.95°C

code	width mm	height mm	distance between centers mm	D mm	A mm	weight kg	capacity lit	thermal output at Δt. 50°K Watt	thermal output at Δt. 50°K BTU/h
IRTL06001500	600	1500	485	95	78	15.5	6.0	568	1937
IRTL07001650	700	1650	585	95	78	18.4	7.1	644	2196
IRTL08001800	800	1800	585	95	78	21.6	8.2	718	2448

TANGENT PLAIN

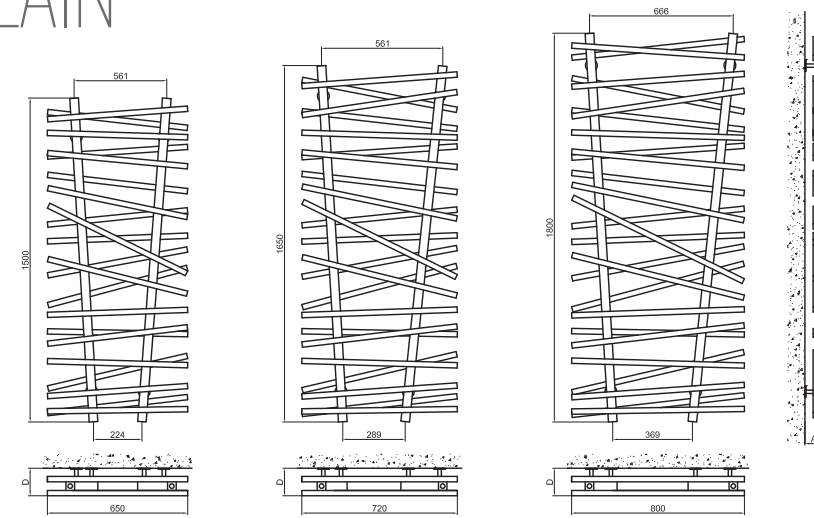


- Fittings: four connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: satin

- Operating temperature: max.95°C

code	width mm	height mm	distance between centers mm	D mm	A mm	weight kg	capacity lit	thermal output at Δt. 50°K Watt	thermal output at Δt. 50°K BTU/h
IRTP06501500	650	1500	224	128	83	28.4	9.7	711	2424
IRTP07201650	720	1650	289	128	83	34.9	11.6	850	2898
IRTP08001800	800	1800	369	128	83	41.2	13.6	930	3171

TANGENT EYE

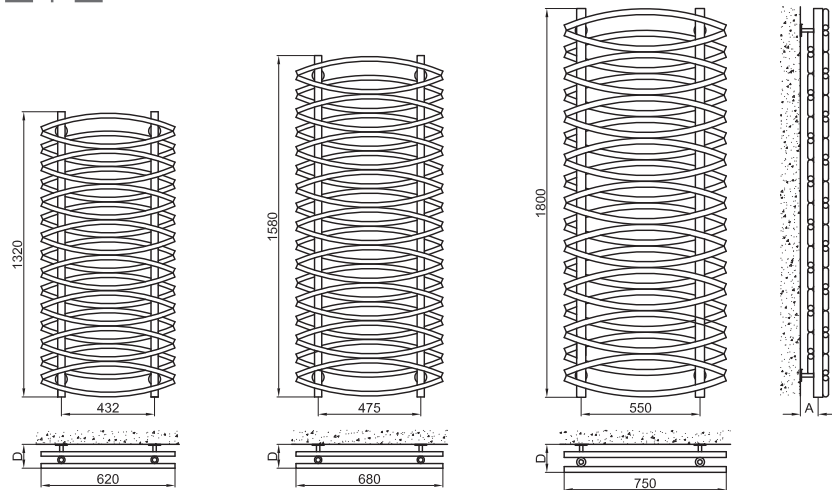

- Fittings: four connections 1/2"
- Material: stainless steel

- Operating pressure: max.6 Bar
- Surface finish: mirror

- Operating temperature: max.95°C

code	width mm	height mm	distance between centers mm	D mm	A mm	weight kg	capacity lit	thermal output at $\Delta t. 50^{\circ}K$ Watt	thermal output at $\Delta t. 50^{\circ}K$ BTU/h
IRTE06201320	620	1320	432	110	72	18.7	7.0	592	2019
IRTE06801580	680	1580	475	110	72	23.1	8.6	694	2366
IRTE07501800	750	1800	550	130	82	32.3	16.1	923	3147