


# SWING



SWING	
Material	steel profiles 40 × 40 mm / steel profiles 25 × 25 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	22, 30

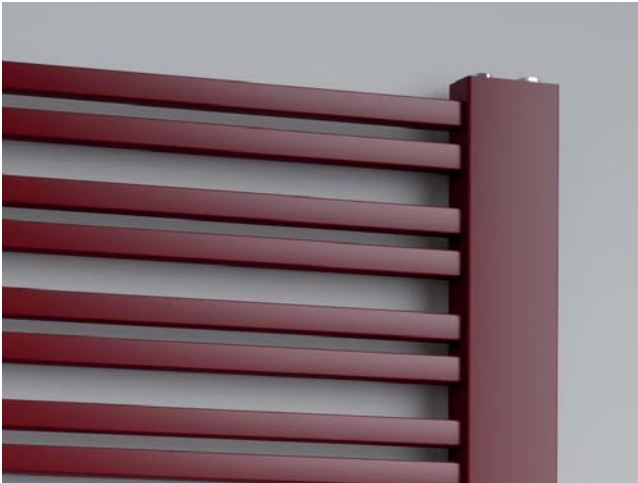

SWING 1210 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1210/600	54	26,8	7,7	1,200	690	568	374	-	-	50
1610/600	54	36,3	10,4	1,200	933	768	505	-	-	50

Thermal power measuring follows in accordance with EN 442.  
The cover of radiator in other colour is available per order.  
Accessories (page 48, 49 and 50) is not part of the radiator.

